

9. Remove hazard light switch (1) from OEM head unit - attach it to double DIN facia plate

Remove upper instrumental panel (2) - attach it to double DIN facia plate

Fix clips to double DIN facia plate

Place double DIN facia plate
Reinstall everything in reverse order to finish installation



Pioneer

**Installation Manual
Double DIN Kit**


dark-grey: CA-HM-KIA 001 DG

light-grey: CA-HM-KIA 001 LG

Kia Sportage II 2010->

Compatible with these Pioneer double DIN devices

Pioneer Navigation

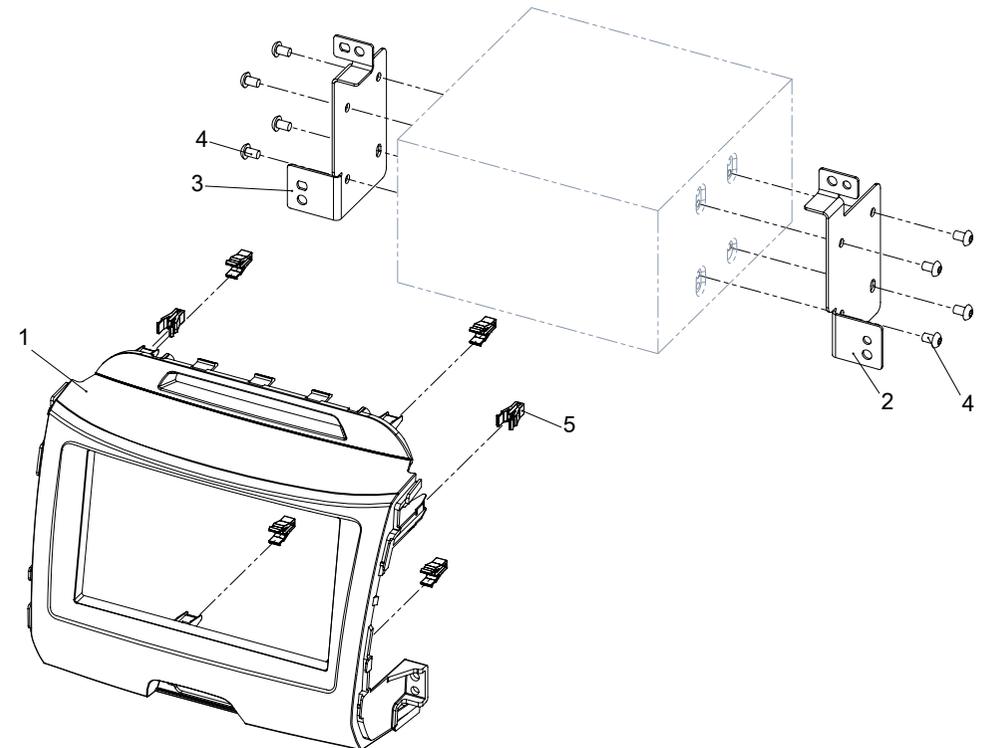

- (1) Double DIN Facia Plate
(2) Mounting bracket (right)

- (3) Mounting bracket (left)
(4) Fixing screws
(5) Clips



1. Remove screws of OEM head unit (left and right)



2. Unclip right side panel



3. Remove right side panel by pulling it towards your direction



4. Unclip left side panel



5. Remove left side panel by pulling it towards your direction



6. Remove screws of OEM head unit
Remove OEM head unit



7. Attach metal mounting brackets to Pioneer Navigation



8. Connect all required circuit points
Fix Pioneer Navigation on dashboard